



WHERE NO GUTTER EXISTS

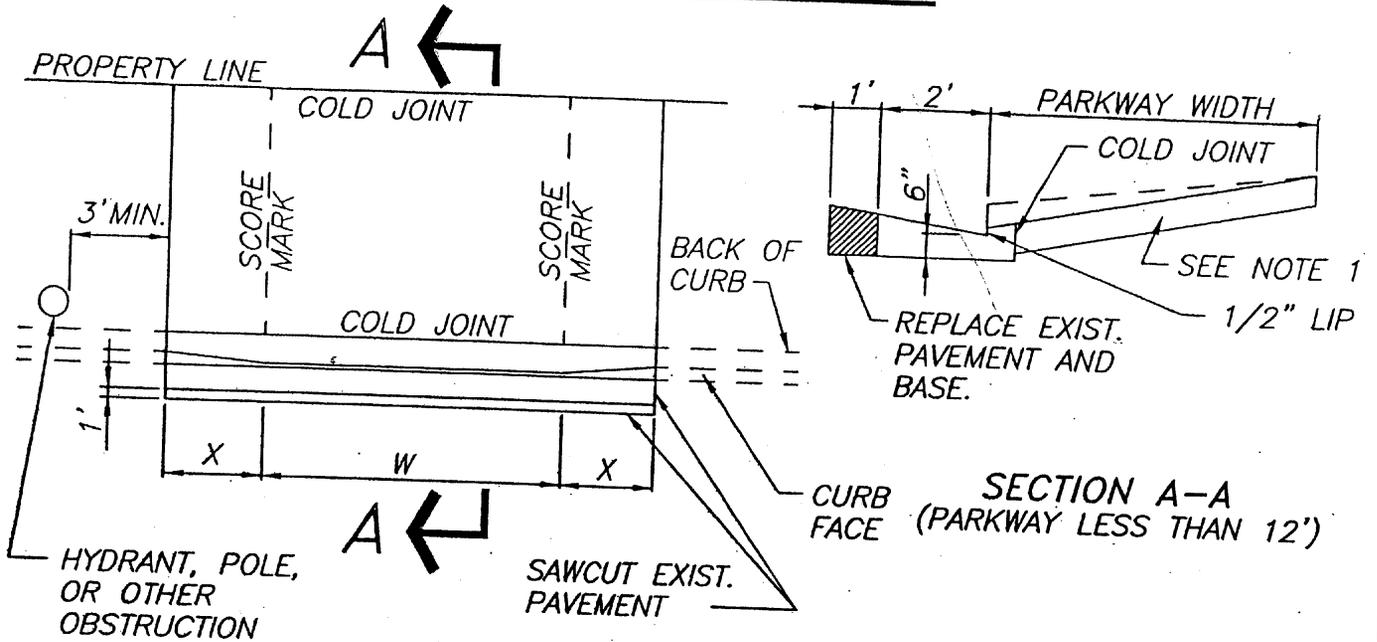

SECTION A-A
(PARKWAY LESS THAN 12')

WHERE GUTTER EXIST OR
NEW GUTTER REQUIRED

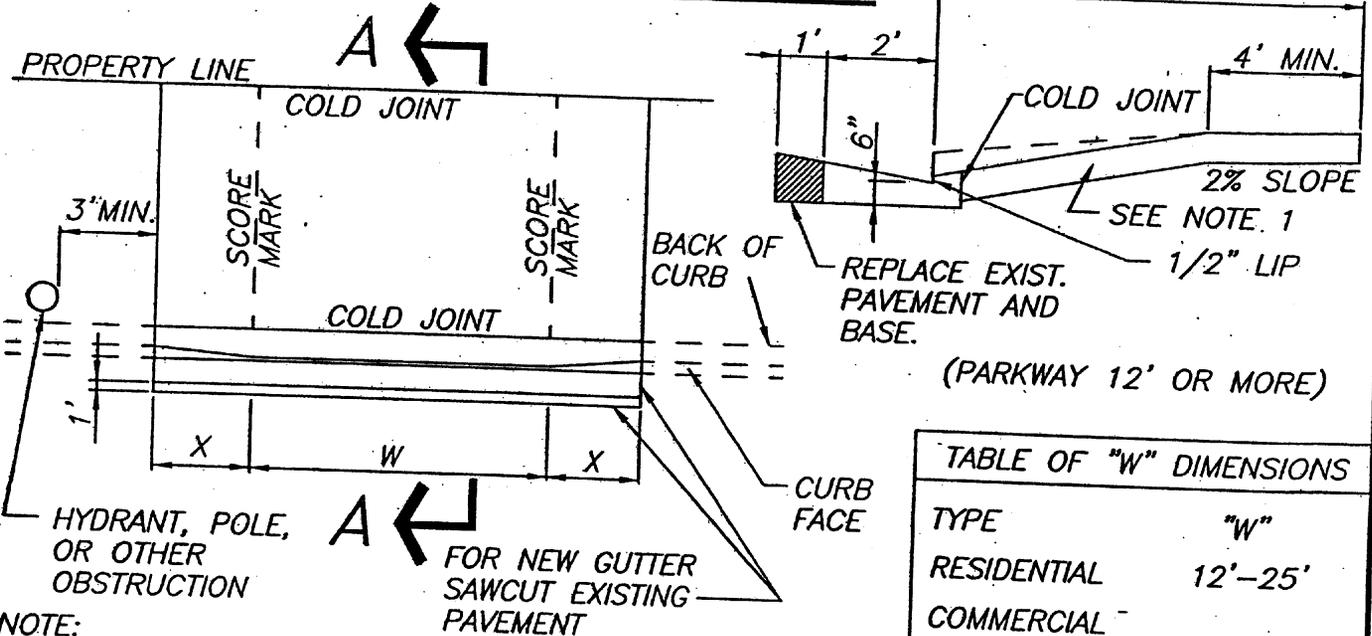

(PARKWAY 12' OR MORE)

TABLE OF "W" DIMENSIONS

TYPE	"W"
RESIDENTIAL	12'-25'
COMMERCIAL OR INDUSTRIAL	30' MAX.

TABLE OF "X" DIMENSIONS

CURB FACE	"X"
UNDER 4"	2'
4" TO UNDER 6"	3'
6" TO UNDER 9"	4'
9" OR OVER	5'

NOTE:

1. REQUIRE 6" THICK FOR RESIDENTIAL AND 8" THICK FOR COMMERCIAL WITH 3250 PSI CONCRETE MIX.
2. IF EXISTING GUTTER IS IN NEED OF REPAIR, AS DETERMINED BY THE CITY PUBLIC WORKS INSPECTOR, THE ENTIRE GUTTER ADJACENT TO THE NEW APPROACH SHALL BE REPLACED ALONG WITH 1 FOOT OF EXISTING PAVEMENT AND BASE AS SHOWN IN SECTION A-A.

CITY OF COVINA
PUBLIC WORKS DEPARTMENT
ENGINEERING DIVISION

APPROVED:
Vince Mathewman
PUBLIC WORKS DIRECTOR
DATE 11/19/97

DRIVEWAY
APPROACH

STANDARD DRAWING NO. 1 REV. 01

17-667-20